cork CONCEPT

FLOATING
design floating floor





Confortable living is not a luxury.

MEDIUM TRAFFIC

CLASS 23 / 32

- ANTI-SLIPPERY
- EASY TO INSTALL
- EXTRA WARMTH & COMFORT
- OK RADIANT HEATING
- RESISTANT
- SOUND REDUCTION

COLLECTIONS	EXCLUSIVE	ETHERNAL
Dimensions	900 x 300 x 11 mm	900 x 300 x 10 mm
Weight EN 430	8 Kg/m2	
Level of use Domestic	23	
Level of use Commercial	31	
Thickness EN 428	10 mm - 11 mm	
Dimensions EN 427	900 x 300 mm	
Dimensional Stability EN434	0.1%	
Resistance against staining EN 438	Grade 1- 5	
Resistance to scratching EN 438-2	4 N / Grade 3	
Residual Indentation EN ISO 24343-1	0.13 mm	
Fire Resistance DIN EN 13501	Cfl -s1	
Anti-sliding properties EN13893	DS	
Formaldehyde emission EN 717-1	E1	
Thermal Resistance EN 12667	0.1 (m2K)/W	
Impact Sound Reduction EN 140	17 dB - 19dB	
Impact Insulation Class IIC according ASTM E 492-09 / ASTM E 989-89	55 dB	
Locking strength ISO 24334	-	
Short side joints	4.8 kN/m	
Long side joints	4.2 kN/m	

GREENGUARD UNICLIC CE

COMPETE 2020 PORTUGAL 2020 UNIÃO EUROPEIA Fundo Europeu de Desenvolvimento Regional

cork CONCEPT

FLOATING
design floating floor

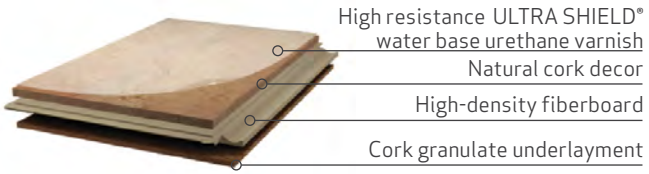



Confortable living is not a luxury.

MEDIUM TRAFFIC

CLASS 23 / 32

- ANTI-SLIPPERY
- ANTI-ALLERGY
- EASY TO REPAIR
- ECO-FRIENDLY
- OK RADIANT HEATING
- PHTHALATE FREE
- RECYCABLE
- RESISTANT

COLLECTIONS	EXCLUSIVE	ETHERNAL
Weight EN 430	900 x 300 x 11 mm	900 x 300 x 10 mm
Level of use Domestic	8 Kg/m2	
Level of use Commercial	23	
Thickness EN 428	32	
Dimensions EN 427	10mm - 11mm	
Dimensional Stability EN434	900 x 300 mm	
Castor chair EN 425	0.1%	
Effect of a furniture leg EN 424	no visible change	
Resistance against impact (big ball) EN 13329, Annex F	no visible change	
Microscratch resistance DIN EN 16094	1800 mm	
Abrasion resistance prEN15468:2013, Annex A (Falling-Sand method)	MSR-A1 / MSR-B3	
Residual Indentation EN ISO 24343-1	5200 revolutions	
Fire Resistance DIN EN 13501	0.13 mm	
Anti-sliding properties EN13893	Cfl -s1	
Anti-slip property DIN 51130:2014	DS	
Formaldehyde emission EN 717-1	R9	
Electrostatic behaviour EN 1815	E1	
Thermal Resistance EN 12667	Antistatic Floor Covering	
Impact Sound Reduction EN 140	0.1 (m2K)/W	
Impact Insulation Class IIC according ASTM E 492-09 / ASTM E 989-89	17 dB - 19dB	
Resistance to changing climate IHD-W-424	55 dB	
Locking strength ISO 24334	No visible change	
Short side joints	4.8 kN/m	
Long side joints	4.2 kN/m	

COMPETE 2020 PORTUGAL 2020 UNIÃO EUROPEIA Fundo Europeu de Desenvolvimento Regional